


LVスリーブ(低圧用水切りスリーブ)

用途: 低圧引込接続箇所及び地中立上ケーブルと変圧器二次側の接続に使用。
電源側には水抜き穴を設けており、事故防止機能を有します。

〈形状〉

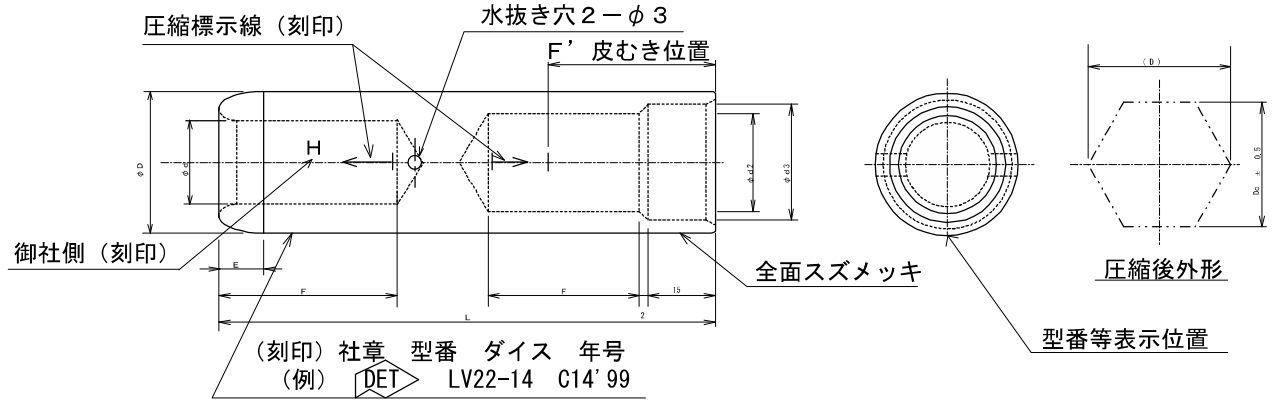

番号	型番	各部の寸法 (mm)										使用 ダイス	適用 カバー
		D	d1	d2	d3	E	F	L	F'	Dc			
1	LV 14 - 14	14.0	5.1	5.1	10.0	5.0	19.0	60.0	24.0	12.1	C14	小	
2	LV 14 - 22	14.0	5.1	6.4 ±0.2	11.5	5.0	19.0	60.0	24.0	12.1	C14	小	
3	LV 14 - 38	19.0	5.1	8.3	13.5	7.0	21.0	65.0	26.0	16.4	C19		
4	LV 14 - 60	19.0	5.1	10.6 +0.3	16.5	7.0	23.0	70.0	28.0	16.4	C19	小	
5	LV 22 - 14	14.0	6.4	5.1	10.0	5.0	19.0	60.0	24.0	12.1	C14	小	
6	LV 22 - 22	14.0	6.4	6.4 ±0.2	11.5	5.0	19.0	60.0	24.0	12.1	C14	小	
7	LV 22 - 38	19.0	6.4 ±0.2	8.3	13.5	7.0	21.0	65.0	26.0	16.4	C19	小	
8	LV 22 - 60	19.0	6.4 ±0.2	10.6	16.5	7.0	23.0	70.0	28.0	16.4	C19	小	
9	LV 22 - 100	23.0	6.4 ±0.4	13.6	19.5	8.0	27.0	80.0	32.0	19.9	C23	小	
10	LV 38 - 14	19.0	8.3	5.1	10.0	7.0	21.0	65.0	26.0	16.4	C19	小	
11	LV 38 - 22	19.0	8.3 ±0.2	6.4	11.5	7.0	21.0	65.0	26.0	16.4	C19	小	
12	LV 38 - 38	19.0	8.3	8.3	13.5	7.0	21.0	65.0	26.0	16.4	C19	小	
13	LV 38 - 60	19.0	8.3 ±0.2	10.6	16.5	7.0	23.0	70.0	28.0	16.4	C19	小	
14	LV 60 - 14	19.0	+0.8 -0.2	10.0	10.0	7.0	23.0	70.0	28.0	16.4	C19	小	
15	LV 60 - 22	19.0	-0.2	10.6 ±0.2	11.5	7.0	23.0	70.0	28.0	16.4	C19	小	
16	LV 60 - 38	19.0		10.6	13.5	7.0	23.0	70.0	28.0	16.4	C19	小	
17	LV 60 - 60	19.0		10.6	16.5	7.0	23.0	70.0	28.0	16.4	C19	小	
18	LV 60 - 100	23.0		10.6 ±0.3	19.5	8.0	27.0	80.0	32.0	19.9	C23	小	
19	LV 60 - 150	29.0		10.6	22.5	10.0	37.0	102.0	42.0	25.1	C29	大	
20	LV 100 - 22	23.0		13 ±0.2	11.5	8.0	27.0	80.0	32.0	19.9	C23		
21	LV 100 - 38	23.0		13.6	13.5	8.0	27.0	80.0	32.0	19.9	C23	小	
22	LV 100 - 60	23.0		13.6 ±0.3	16.5	8.0	27.0	80.0	32.0	19.9	C23	小	
23	LV 100 - 100	23.0		13.6 ±0.3	19.5	8.0	27.0	80.0	32.0	19.9	C23	小	
24	LV 100 - 150	29.0		13.6	22.5	10.0	37.0	102.0	42.0	25.1	C29	大	
25	LV 100 - 200	32.0	+1.0 -0.2	13.6 ±0.4	26.5	10.0	36.5	102.0	41.5	27.7	C32	大	
26	LV 150 - 60	29.0		16.7 ±0.3	16.5	10.0	37.0	102.0	42.0	25.1	C29	大	
27	LV 150 - 100	29.0	+0.8 -0.2	16.7 ±0.3	19.5	10.0	37.0	102.0	42.0	25.1	C29	大	
28	LV 150 - 150	29.0	-0.2	16.7 ±0.3	22.5	10.0	37.0	102.0	42.0	25.1	C29	大	
29	LV 150 - 200	32.0		16.7 ±0.4	26.5	10.0	36.5	102.0	41.5	27.7	C32	大	
30	LV 200 - 100	32.0	+1.0 -0.2	18.8 ±0.4	19.5	10.0	36.5	102.0	41.5	27.7	C32	大	
31	LV 200 - 150	32.0	-0.2	18.8 ±0.4	22.5	10.0	36.5	102.0	41.5	27.7	C32	大	
32	LV 200 - 200	32.0		18.8 ±0.4	26.5	10.0	36.5	102.0	41.5	27.7	C32	大	

